

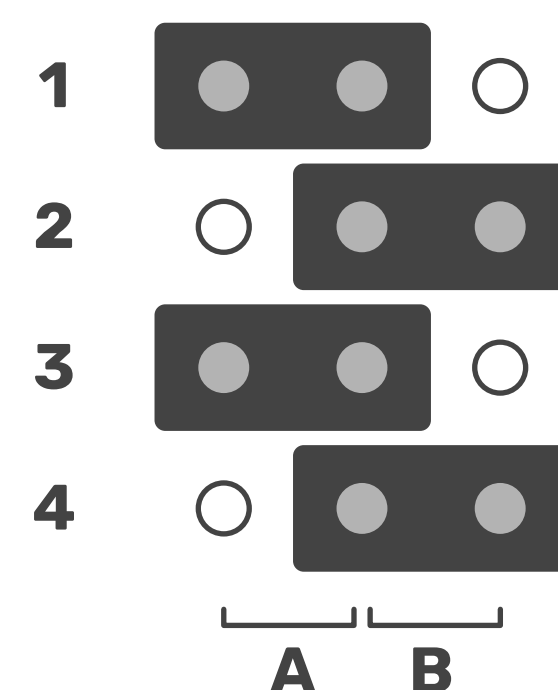
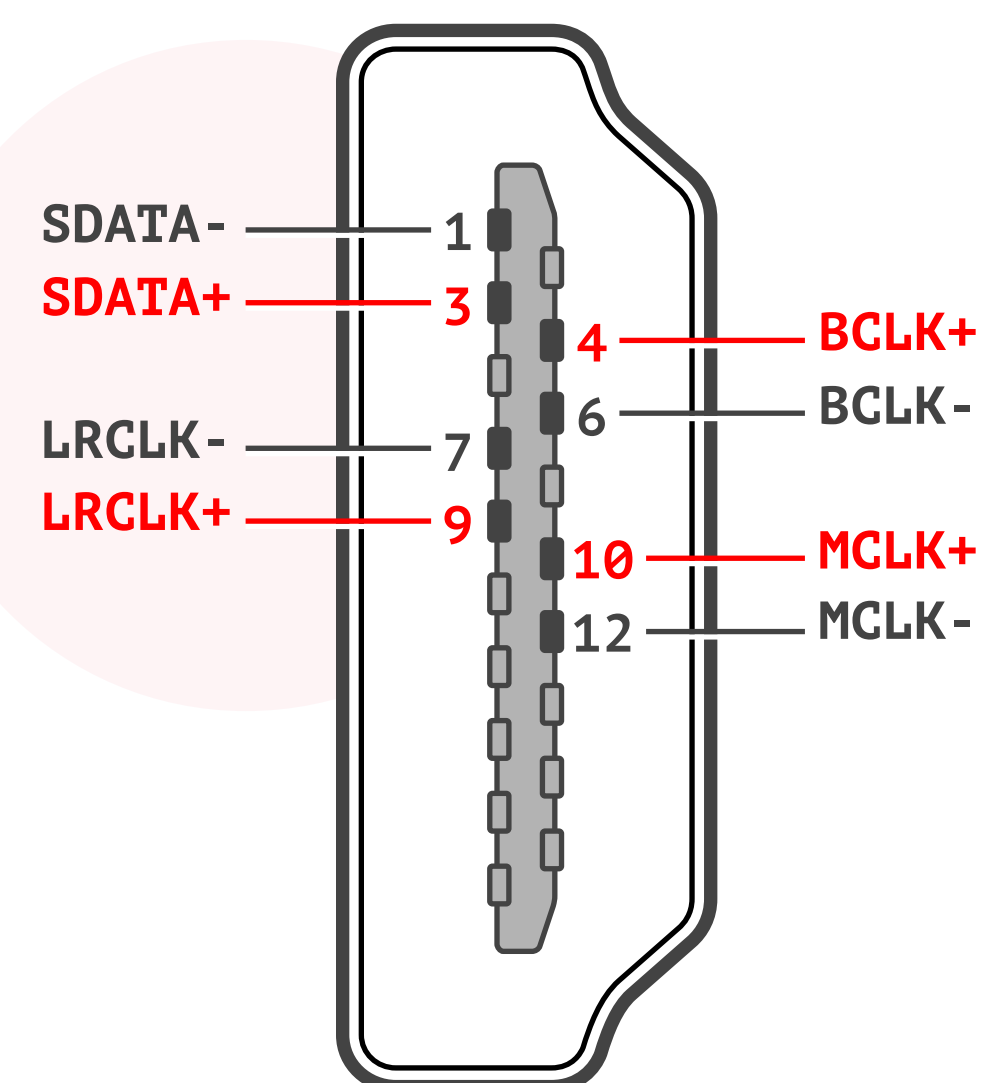


I2S LVDS Pin-outs & Jumper Settings

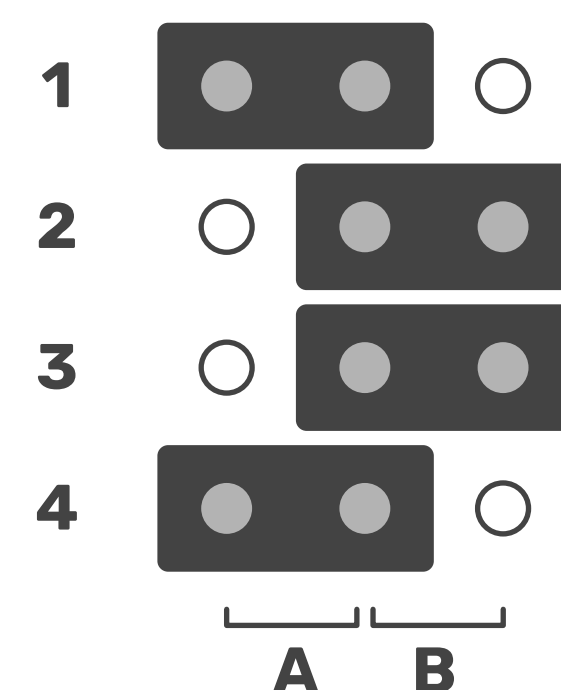



Type 1

Audio-GD	Magna Hifi
Aune	Matrix (B definition)
Channel Islands Audio	M2Tech
Cocktail Audio	Mola Mola (PCM)
Denafraps	Musica Pristina
DiDiT High-End	Nuprime
Eleven XI AUDIO	PSaudio
Empirical Audio	Singxer Specification 3 & 5
FiiO Specification 1 & 3	Sonore
Hifime	Volumio Rivo+
Holo Audio	X-Sabre (PCM)
K&K Audio	

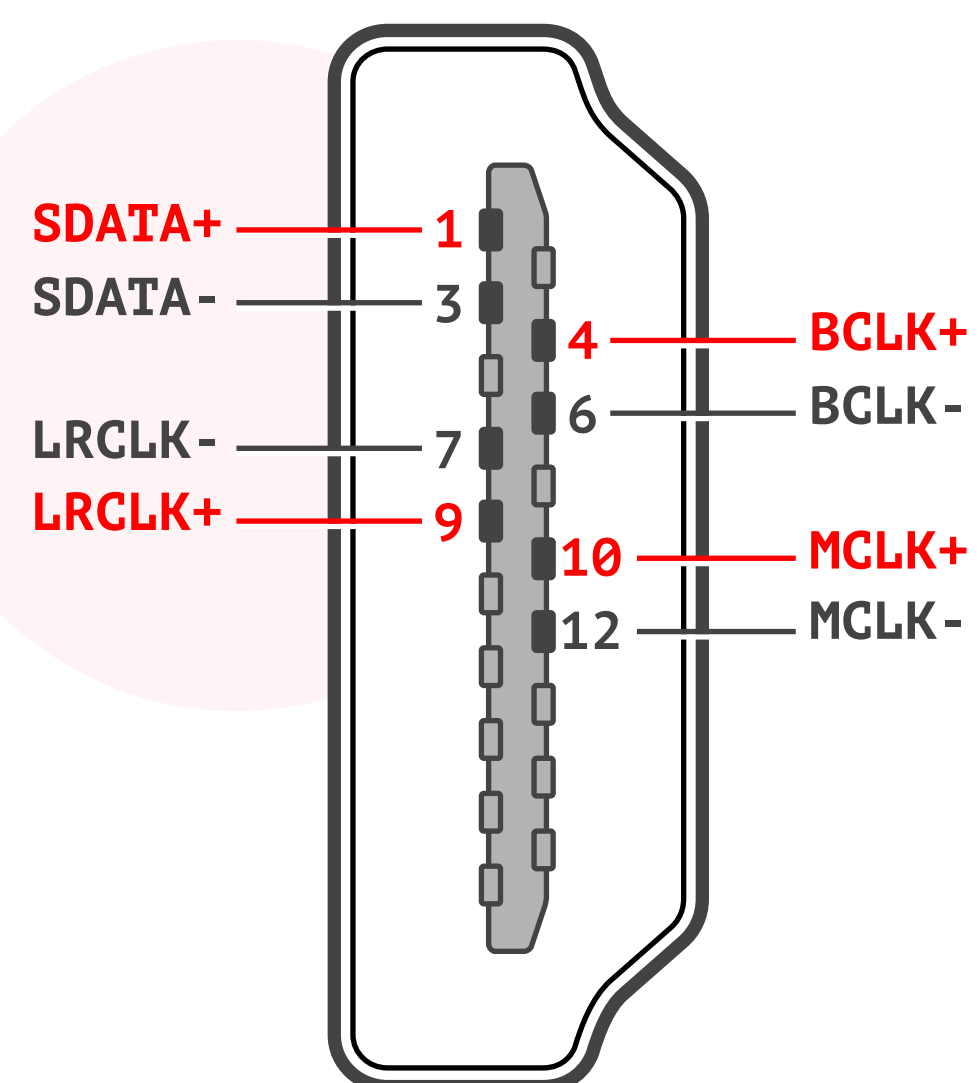



Type 2

Gustard Specification 1 (PCM)
Gustard Specification 2 (PCM)
Matrix (A definition)
Rockna
Singxer Specification 1, 2 & 4
SMSL (I2S output)
Wyred4Sound

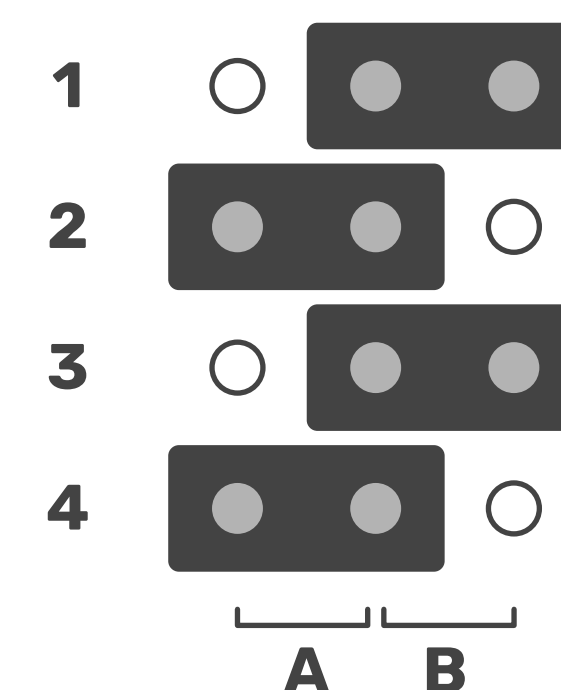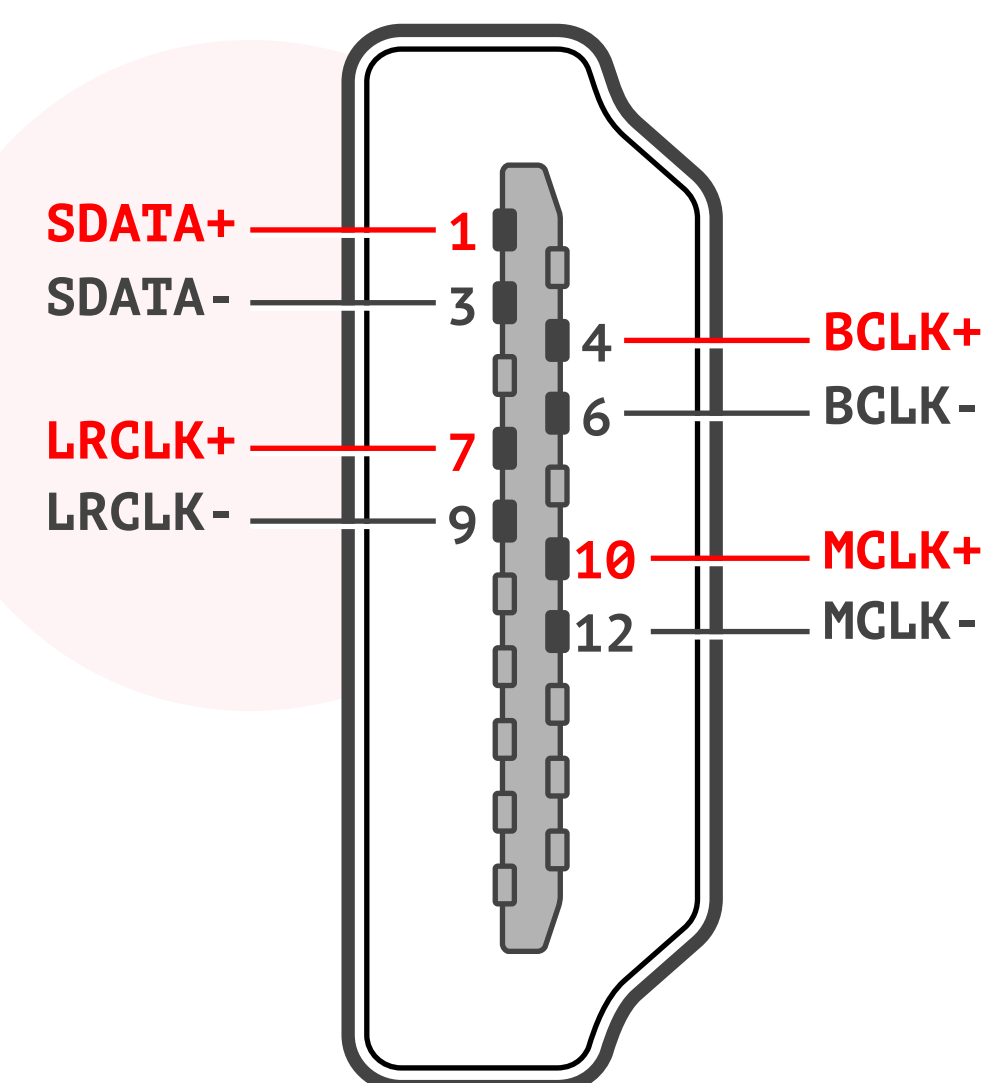

Type 3

Audiobyte
Antipodes
Eversolo
FiiO Specification 4
Gustard U12/X12/X20/A20H
LAIV DDC (mode 5)
LKS
Pink Faun
SMSL X-USB
Topping (phase standard)
Wadia

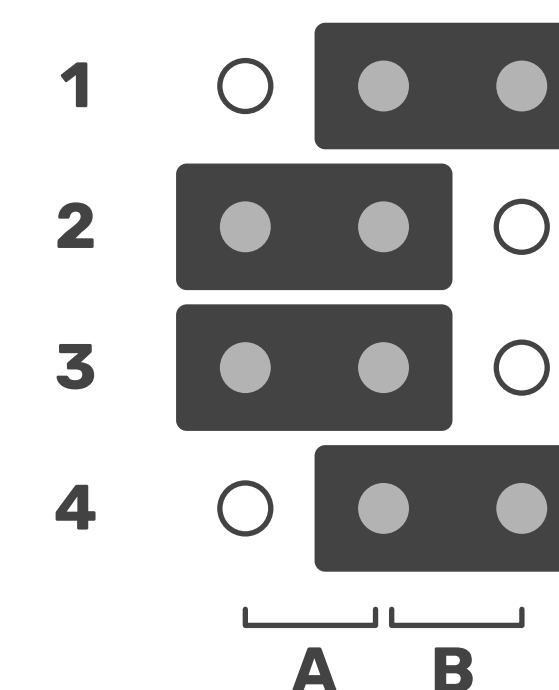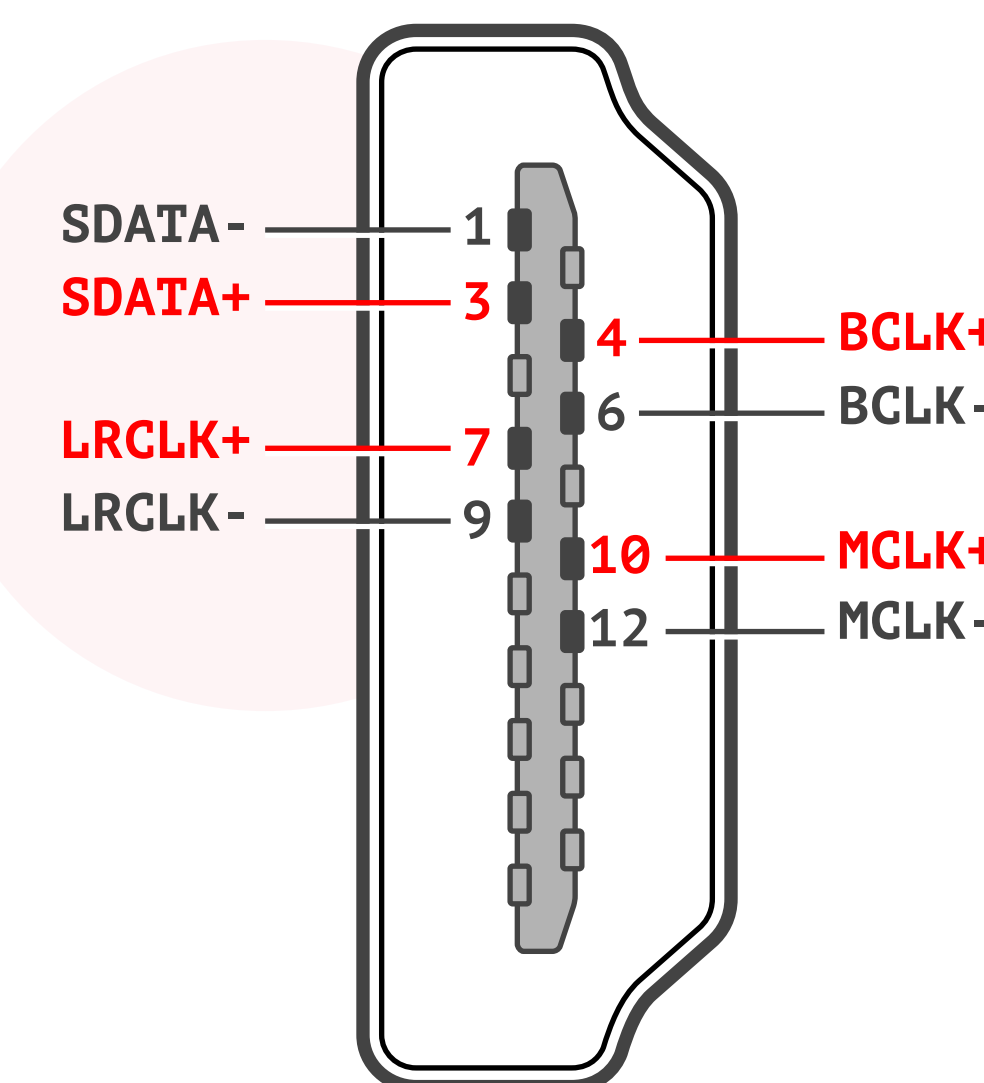

Type 4

IanCanada

SDATA = serial data
digital music data

LRCLK = left/right clock
a.k.a. word clock, defines the channel of the incoming data

BCLK = bit clock

MCLK = master clock